



Mobile Printers

MX30 / MX30i

A Portable Light Weight Design
MX30 & MX30i is Your Best Pal in Mobile Life.

GoDEX MX30 & MX30i Mobile Printer is powered by Lithium-ion battery for longer uptime, along with water / dust resistant and shatterproof design. MX30i has an embedded OLED panel to display messages. MX30 & MX30i series fit 1.5" to 3" label roll, which is a powerful tool for retail / storage / parking lot applications.



- Supports multiple label width & types.
- Drop & Fit label installation design.
- Intuitive OLED display with 3 buttons.
- Water and dust resistant meeting IP54 standard.
- Versatile interfaces with both wire (RS232 and USB) & wireless (Bluetooth and Wi-Fi) connectivity.

GoDEX

Specification

MX30i

Mobile Printer

Model		MX30	MX30i
Print Method		Direct Thermal	
Resolution		203 dpi (8 dots/mm)	
Print Speed		Up to 4 IPS (101.6 mm/s)	
Print Width		2.8" (72 mm)	
Print Length		30" (~762 mm)	
Processor		32 Bit RISC CPU	
Memory Flash		128 MB Flash (60 MB for user storage)	
SDRAM		32 MB	
Sensor Type		Gap sensor , Fixed transmissive sensor , Fixed reflective sensor	
Media Types		Direct Thermal receipt, anti-UV receipt, gap label, left side alignment Inter-label gap size from 2 mm to 4 mm. 3 mm preferred	
Width		Max. 3.15" (80 mm), Min. 1.5" (38.1 mm)	
Thickness		Min 0.0508 mm, Max 0.165 mm	
Media roll Diameter		Max. 2.35" (60 mm) on 0.5" (12.5 mm) core	
Printer Language		GPOS Emulations or EZPL / GZPL / GEPL Emulations	
Software		GoLabel (for EZPL only)	
Label Design Software		GoLabel (for EZPL only)	
Driver		MAC, Linux, Windows 2000 / XP / VISTA / Windows 7 / Windows 8.1/Windows 10	
DLL		Win CE, .NET, Andriod, Windows Mobile, Windows 2000 / XP / VISTA / Windows 7 / Windows 8.1/Android	
Resident Fonts		6, 8, 10, 12, 14, 18, 24, 30, 16x26 and OCR A & B, 0°, 90°, 180°, 270° rotatable	
Bitmap Fonts		TTF Fonts (Bold / Italic / Underline), 0°,90°, 180°, 270° rotatable	
TTF Fonts		90°, 180°, 270° rotatable, single characters 90°, 180°, 270° rotatable	
Download Fonts		16x16, 24x24. Traditional Chinese (BIG-5), Simplified Chinese (GB2312), Japanese (S - JIS), Korean (KS - X1001)	
Bitmap Fonts		90°, 180°, 270° rotatable and 8 times expandable in horizontal and vertical directions	
Asian Fonts		90°, 180°, 270° rotatable	
TTF Fonts		90°, 180°, 270° rotatable	
Barcodes		Code 39, Code 93, EAN-8, EAN-13, EAN 8/13 (with 2 & 5 digits extension), UPC-A, UPC-E, UPC-A and UPC-E with EAN 2 or 5 digit extension, Interleaved 2-of-5 (I 2 of 5), Interleaved 2- o-f 5 with Shipping Bearer Bars, Codabar, Code 128 (subset A, B, C), EAN 128, RPS 128, UCC 128, UCC/EAN-128 K-Mart, Random Weight, Postnet, ITF 14, China Postal Code, HIBC, MSI, Plessey, Telepen, FIM, GS1 DataBar, German Post Code, Planet 11 & 13 digit, Japanese Postnet, Standard 2 of 5, Industrial 2 of 5 , Logmars, Code 11, ISBT -128, Code 32	
1-D Bar codes		PDF417, Datamatrix code, MaxiCode, QR code, Micro PDF417, Micro QR code and Aztec code, Code 49, Codablock F , TLC 39	
2-D Bar codes		CODEPAGE 437, 850, 851, 852, 855, 857, 860, 861, 862, 863, 865, 866, 869, 737 WINDOWS 1250, 1251, 1252, 1253, 1254, 1255, 1257 Unicode UTF8 、 UTF16BE 、 UTF16LE	
Code Pages		Resident graphic file types are BMP and PCX, other graphic formats are downloadable from the software	
Graphics		RS232 + USB 2.0 port, mini-B type connector	
Interfaces		Bluetooth 2.1 + EDR	
Control Panel		4 dual color LEDs for Power, Battery, Communication, Error status indication. 3 buttons for Power, Feed and BT functions	
LCD Display		Graphic OLED 128 x 64 dots with 3 buttons for Up, Down and Enter functions	
Power Adapter		Switching power supply I/P: 100 / 240 V AC, 50 / 60 Hz, DC 9 V / 2.2 A	Switching power supply I/P: 100 / 240 V AC, 50 / 60 Hz, DC 9 V / 2.0 A
Battery		Rechargeable DC 7.4 V Lithium-ion battery, 2500 mAh or higher capacitance	
Environment		Rechargeable DC 7.4 V Lithium-ion battery, 2500 mAh or higher capacitance	
Operation Temperature		32 °F to 122 °F (0°C to 50°C)	
Storage Temperature		-4 °F to 140 °F (-20°C to 60°C)	
Humidity		10 – 90 %, non - condensing.	
Operation		10 – 90 %, non - condensing.	
Storage		10 – 90 %, non - condensing.	
IP Rating		Intrusion Protection, IP42 requirement for case design, IP54 for protective case	
Drop Level		1.5 meter height	
Agency Approvals		CE EMC, FCC part 15B class B, FCC Part 15C, SRRC, NCC, CB, UL, cUL, Energy Star V2.0	
Dimension		6.71" (170.63 mm)	
Length		3.11" (79 mm)	
Height		4.48" (114.01 mm)	
Width		4.48" (114.01 mm)	
Weight		1.45 lbs (660 g), with battery	1.47 lbs (670 g), with battery
Options		USB cable RS-232 cable Li-ion battery 4-bay battery charger station Car charger adapter Protective case WiFi (comply with IEEE 802.11b/g/n)	

*Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

Applications

Applications for Labels & Barcodes

MX30 & MX30i support label & barcode printings Anywhere and Anytime.



Warehouses, Logistic & Transportation

Cross Docking, inventory management, receiving / shipping, work - in - process tracking, or related industrial applications.



Retail

Content labels, receipts for registered mails, invoices & receipts, postage labels, etc.



Parking Management

Parking receipt, parking ticket, and so on.


GoDEX

LABEL DESIGN SOFTWARE

GoLabel Software / User
Friendly

GoLabel is based on a WYSIWYG (what you see is what you get) user interface, makes everything so easy for you to create and print barcode labels. GoLabel is the first - choice label design software that you can't miss it!

Go visit www.godexintl.com and download GoLabel to experience it!

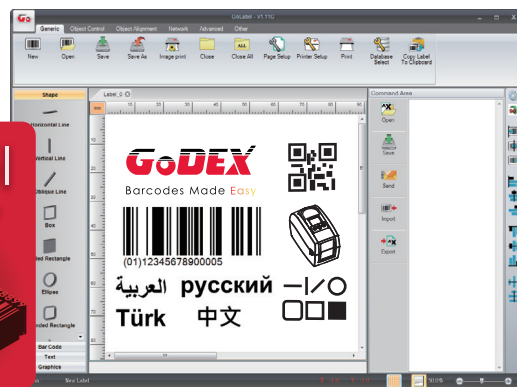


GoDEX

RIBBONS

High quality original GoDEX thermal
transfer ribbons

GoDEX offers premium thermal transfer ribbons that will fit most of your printing applications.

- Wax
- Wax / Resin
- Resin
- Near Edge

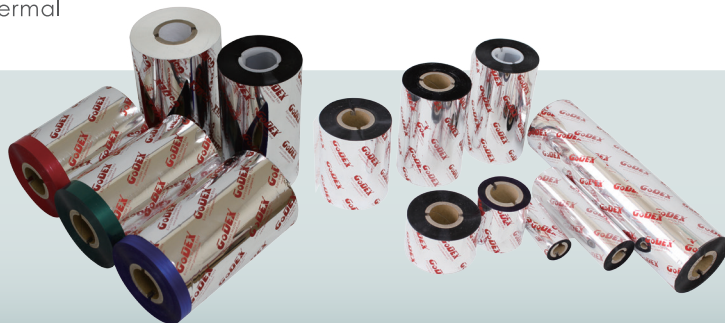

GoDEX
www.godexintl.com

Godex International
(Headquarters)
Telephone : +886 2 2225 8580
Contact us : infoGT@godexintl.com

Godex Americas
Telephone : +1 805 987 5100
Contact us : infoGA@godexintl.com

Godex China
Telephone : +86 21 56651313
Contact us : infoGC@godexintl.com

Godex Europe
Telephone : +49 2193 53396 0
Contact us : infoGE@godexintl.com