



Mobile Printers

MX30 / MX30i

A Portable Light Weight Design
MX30 & MX30i is Your Best Pal in Mobile Life.

GoDEX MX30 & MX30i Mobile Printer is powered by Lithium-ion battery for longer uptime, along with water / dust resistant and shatterproof design. MX30i has an embedded OLED panel to display messages. MX30 & MX30i series fit 1.5" to 3" label roll, which is a powerful tool for retail / storage / parking lot applications.



- Supports multiple label width & types.
- Drop & Fit label installation design.
- Intuitive OLED display with 3 buttons.
- Water and dust resistant meeting IP54 standard.
- Versatile interfaces with both wire (RS232 and USB) & wireless (Bluetooth and Wi-Fi) connectivity.

GoDEX

Specification

MX30/MX30i

Mobile Printer

Model		MX30	MX30i
Print Method		Direct Thermal	
Resolution		203 dpi (8 dots/mm)	
Print Speed		Up to 4 IPS (101.6 mm/s)	
Print Width		2.8" (72 mm)	
Print Length		30" (~762 mm)	
Processor		32 Bit RISC CPU	
Memory Flash		128 MB Flash (60 MB for user storage)	
SDRAM		32 MB	
Sensor Type		Gap sensor , Fixed transmissive sensor , Fixed reflective sensor	
Media Types		Direct Thermal receipt, anti-UV receipt, gap label, left side alignment	
		Inter-label gap size from 2 mm to 4 mm. 3 mm preferred	
Width		Max. 3.15" (80 mm), Min. 1.5" (38.1 mm)	
Thickness		Min 0.0508 mm, Max 0.165 mm	
Media roll Diameter		Max. 2.35" (60 mm) on 0.5" (12.5 mm) core	
Printer Language		GPOS Emulations or EZPL / GZPL / GEPL Emulations	
Software	Label Design Software	GoLabel (for EZPL only), GoApp (Andriod),GoApp (iOS)	
	Driver	MAC, Linux, Windows 2000 / XP / VISTA / Windows 7 / Windows 8.1/Windows 10	
	DLL	Win CE, .NET, Andriod, Windows Mobile, Windows 2000 / XP / VISTA / Windows 7/ 8.1/10 , Android,iOS	
Resident Fonts		6, 8, 10, 12, 14, 18, 24, 30, 16x26 and OCR A & B. 0°, 90°, 180°, 270° rotatable	
		TTF Fonts (Bold / Italic / Underline). 0°,90°, 180°, 270° rotatable	
Download Fonts	Bitmap Fonts	90°, 180°, 270° rotatable, single characters 90°, 180°, 270° rotatable	
	Asian Fonts	16x16, 24x24. Traditional Chinese (BIG-5), Simplified Chinese (GB2312), Japanese (S - JIS), Korean (KS - X1001)	
		90°, 180°, 270° rotatable and 8 times expandable in horizontal and vertical directions	
		TTF Fonts	
		90°, 180°, 270° rotatable	
Barcodes		1-D Bar codes	
		Code 39, Code 93, EAN-8, EAN-13, EAN 8/13 (with 2 & 5 digits extension), UPC-A, UPC-E, UPC-A and UPC-E with EAN 2 or 5 digit extension, Interleaved 2-of-5 (I 2 of 5), Interleaved 2- of 5 with Shipping Bearer Bars, Codabar, Code 128 (subset A, B, C), EAN 128, RPS 128, UCC 128, UCC/EAN-128 K-Mart, Random Weight, Postnet, ITF 14, China Postal Code, HIBC, MSI, Plessey, Telepen, FIM, GS1 DataBar, German Post Code, Planet 11 & 13 digit, Japanese Postnet, Standard 2 of 5, Industrial 2 of 5 , Logmars, Code 11, ISBT -128, Code 32	
		2-D Bar codes	
		PDF417, Datamatrix code, MaxiCode, QR code, Micro PDF417, Micro QR code and Aztec code, Code 49, Codablock F , TLC 39	
Code Pages		CODEPAGE 437, 850, 851 , 852, 855, 857, 860, 861 , 862, 863, 865, 866, 869, 737	
		WINDOWS 1250, 1251, 1252, 1253, 1254, 1255, 1257	
		Unicode UTF8 、 UTF16BE 、 UTF16LE	
Graphics		Resident graphic file types are BMP and PCX, other graphic formats are downloadable from the software	
Interfaces		RS232 + USB 2.0 port, mini-B type connector	
		Bluetooth 2.1 + EDR	
Control Panel		4 dual color LEDs for Power, Battery, Communication, Error status indication.	
		3 buttons for Power, Feed and BT functions	
LCD Display		Graphic OLED 128 x 64 dots with 3 buttons for Up, Down and Enter functions	
Power Adapter		Switching power supply	Switching power supply
		I/P: 100 / 240 V AC, 50 / 60 Hz, DC 9 V / 2.2 A	I/P: 100 / 240 V AC, 50 / 60 Hz, DC 9 V / 2.0 A
Battery		Rechargeable DC 7.4 V Lithium-ion battery, 2500 mAH or higher capacitance	
Environment	Operation Temperature	14 °F to 122 °F (-10°C to 50°C)	
	Storage Temperature	-4 °F to 140 °F (-20°C to 60°C)	
Humidity	Operation	10 – 90 %, non - condensing.	
	Storage	10 – 90 %, non - condensing.	
IP Rating		Intrusion Protection, IP42 requirement for case design, IP54 for protective case	
Drop Level		1.5 meter height	
Agency Approvals		CE EMC, FCC part 15B class B, FCC Part 15CCCC, SRRC, NCC, CB, UL, cUL, Energy Star V2.0	
Dimension	Length	6.71" (170.63 mm)	
	Height	3.11" (79 mm)	
	Width	4.48" (114.01 mm)	
Weight		1.45 lbs (660 g), with battery	1.47 lbs (670 g), with battery
Options		USB cable	
		RS-232 cable	
		Li-ion battery	
		4-bay battery charger station	
		Car charger adapter	
		Protective case	
		WiFi (comply with IEEE 802.11b/g/n)	

*Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

Applications

Applications for Labels & Barcodes

MX30 & MX30i support label & barcode printings Anywhere and Anytime.



Warehouses, Logistic & Transportation

Cross Docking, inventory management, receiving / shipping, work - in - process tracking, or related industrial applications.



Retail

Content labels, receipts for registered mails, invoices & receipts, postage labels, etc.



Parking Management

Parking receipt, parking ticket, and so on.


GoDEX

LABEL DESIGN SOFTWARE

GoLabel Software / User
Friendly

GoLabel is based on a WYSIWYG (what you see is what you get) user interface, makes everything so easy for you to create and print barcode labels. GoLabel is the first - choice label design software that you can't miss it!

Go visit www.godexintl.com and download GoLabel to experience it!

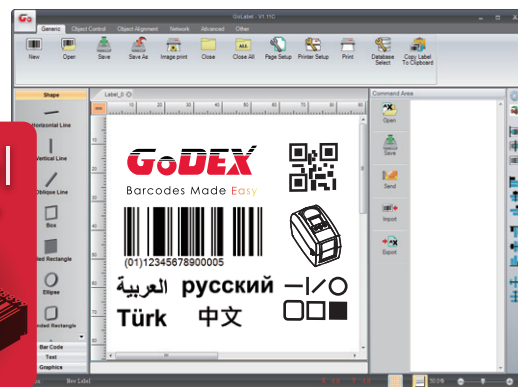


GoDEX

RIBBONS

High quality original GoDEX thermal
transfer ribbons

GoDEX offers premium thermal transfer ribbons that will fit most of your printing applications.

- Wax
- Wax / Resin
- Resin
- Near Edge

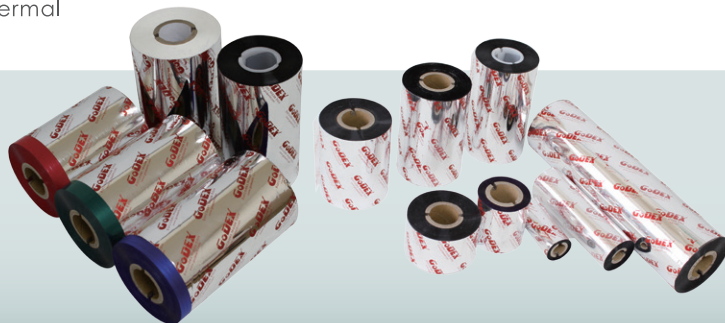

GoDEX
www.godexintl.com

Godex International
(Headquarters)
Telephone : +886 2 2225 8580
Contact us : infoGT@godexintl.com

Godex Americas
Telephone : +1 805 987 5100
Contact us : infoGA@godexintl.com

Godex China
Telephone : +86 21 56651313
Contact us : infoGC@godexintl.com

Godex Europe
Telephone : +49 2193 53396 0
Contact us : infoGE@godexintl.com